

# EU-Type Examination Certificate

No. P5A 089530 0014 Rev. 00

**Holder of Certificate:** **TruBlue LLC**  
**dba Head Rush Technologies**  
1699 Cherry Street  
Louisville CO 80027  
USA

**Product:** **PPE against fall from a height**  
**Mobile Connecting Devices (MCD) EN 17109**

**Model(s):** **Light Speed EZ Clip Trolley**

**Tested according to:** DIN EN 17109:2020

The Certification Body of TÜV SÜD Product Service GmbH confirms that the listed product fulfils the basic requirements with Annex V (Module B) of Regulation (EU) 2016/425 on personal protective equipment according to Article 19 (PPE of category III). This certificate refers only to the submitted sample for testing and certification and on its technical documentation. The validity of this certificate based on an ongoing surveillance in accordance with Module C2 or D of Regulation (EU) 2016/425 by a Notified Body. For details see: [www.tuvsud.com/ps-cert](http://www.tuvsud.com/ps-cert)

**Test report no.:** 713272392

**Valid until:** 2028-06-27

**Date,** 2023-06-28



( Matthias Völz )

# EU-Type Examination Certificate


No. P5A 089530 0014 Rev. 00

## Parameters:

Model:	Light Speed EZ Clip Trolley; Mobile connecting device for ropes courses conform to DIN EN 17109, category B, for 1 person use for attachment on steel cables Ø 9 mm- 13 mm in ropes courses; optional with catch hook;
Construction:	aluminium alloy body with 2 riveted aluminium alloy wheels with ball bearings and user fixation carabiner in hole in the middle of body; plastic part for closing holes and gaps on body;
Dimensions:	145,5 mm x 166 mm x 84,5 mm;
Body:	two 4 mm thick bent aluminium sheets, each with 2 holes Ø 8,6 mm for pulley wheel axles, 1 hole Ø18mm for auxiliaries and 1 hole Ø 19,5mm with plastic insert, inner Ø13 mm, for user fixation carabiner attachment point; with groove for connector parking;
Pulleys:	2 stainless steel sheaves Ø37 mm x 18 mm, rope radius 7,53 mm; with ball bearing Ø22 mm x 7 mm; fixed with stainless steel bolt rivet 8 mm;
User fixation carabiner:	not detachable aluminium alloy carabiner with self-closing and automatic locking gate, opening width 28 mm; dimensions 133 mm x 86 mm x 15,5 mm; carabiner positioning in 4 versions;
Extras:	Version with riveted catch hook from 4 mm thick bent aluminium sheet;
Marking:	model name, "read instructions"-pictogram; manufacturer address, CE-marking; CNB/P/11.104; pictogram "drive direction"; "17 kN"; rope range (9 ≤Ø≤13 mm); manufacturing date; EN 17109: 2019;
Weight:	508 Grams without hook; 564 Grams with hook;
Old EU type examination certificate:	P5 17 08 89530 003;
Old Technical Report:	713111125/2;

# EU-Type Examination Certificate

No. P5A 089530 0014 Rev. 00

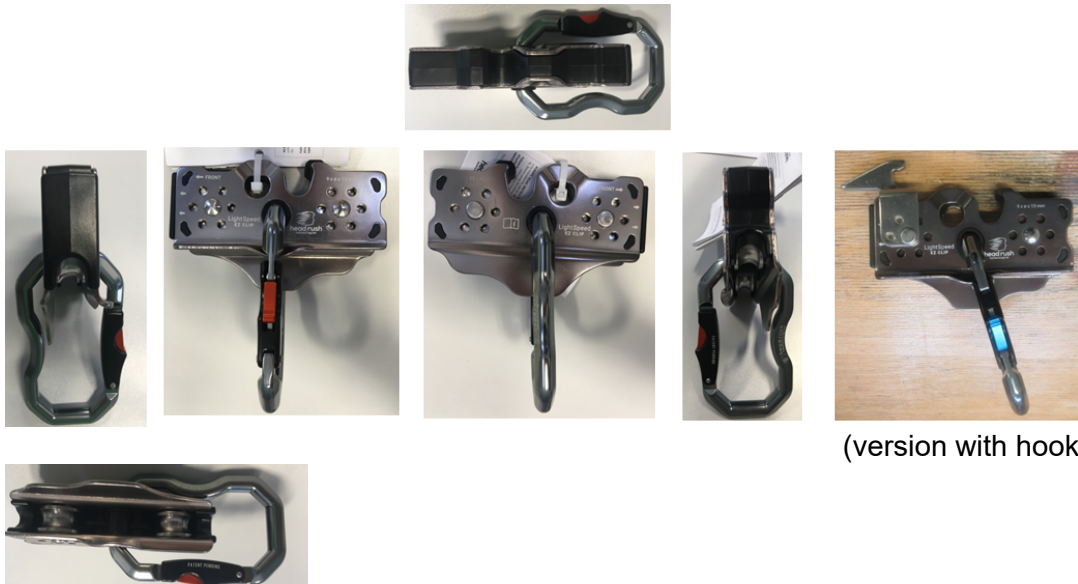

(version with hook)